



542900

(43) International Publication Date
5 August 2004 (05.08.2004)

PCT

(10) International Publication Number
WO 2004/065137 A2

- (51) International Patent Classification⁷: **B60B**
- (21) International Application Number:
PCT/GB2004/000209
- (22) International Filing Date: 20 January 2004 (20.01.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0301502.1 23 January 2003 (23.01.2003) GB
- (71) Applicant and
(72) Inventor: **TAYLOR, Michael, Lawrence** [GB/GB]; 283
Rayleigh Road, Thundersley, Essex SS7 3XF (GB).

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Published:

— without international search report and to be republished upon receipt of that report

- (74) Agents: **WALDER, Jeremy, Thomas** et al.; Sanderson & Co., 34 East Stockwell Street, Colchester, Essex CO1 1ST (GB).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **MOTORCYCLE WHEEL MAINTENANCE SUPPORT**

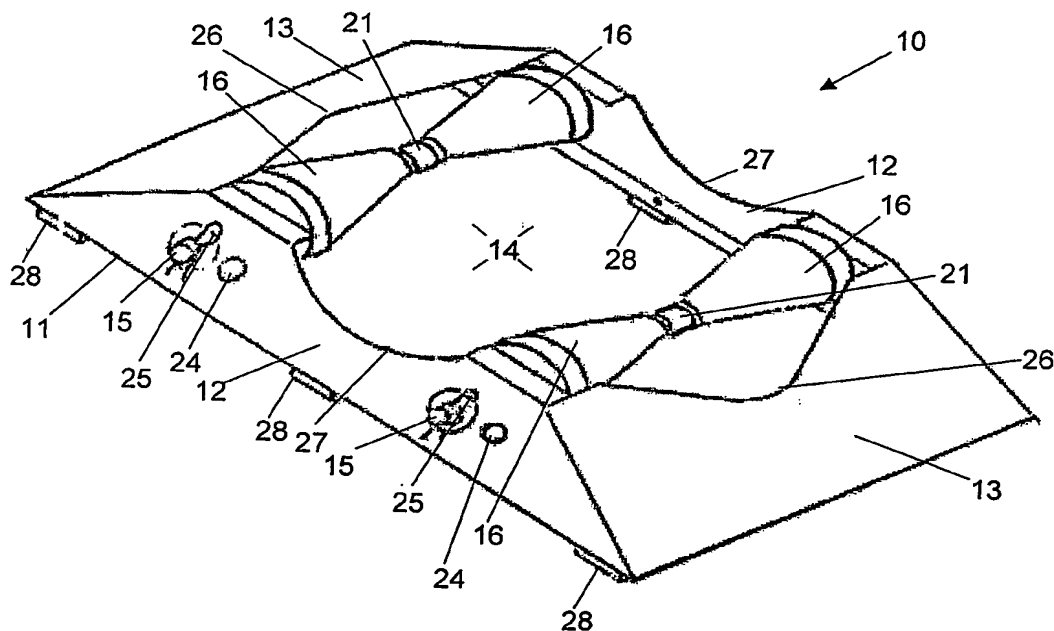

(57) Abstract: A maintenance support (10) for a motorcycle wheel (30), comprises a base frame (11) having a working area (14) defined between a pair of opposed side walls (12) and a pair of spaced parallel axles (15) extending transversely from one side wall (12) to the other. Each axle (15) is provided with a pair of spaced rollers (16) adapted to support a motorcycle wheel (30) thereon. Each roller (16) is mounted on its respective axle (15) for free rotation, independently of the other roller (16) of the pair, and each pair of rollers (16) co-operates to present a generally V-shaped profile to a motorcycle wheel (30) located on said maintenance support (10).

WO 2004/065137 A2